

REVISIONS								
SYM	DISCRIPTION		DATE	APPROVED	SYM	DISCRIPTION	DATE	APPROVED
△	NOTE	ROHS STANDARD	18/JAN/08	AARON	△			
△					△			

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: AC 150V RMS.
2. CURRENT RATING: 1.5A.
3. CONTACT RESISTANCE: 30mΩ MAX.
4. INSULATION RESISTANCE: 500MΩ MIN. AT DC 500V.
5. DIELECTRIC STRENGTH: AC 1000V RMS 60Hz, 1 MINUTE.
6. OPERATING: 750 CYCLES MIN.

MECHANICAL:

1. HOUSING : DSM STANYL TE250F6 (NYLON-46), HEAT DEFLECTION TEMP. 290° UL94V-0. COLOR: BLACK.
2. SHIELD : COPPER ALLOY 0.25mm THICKNESS PLATED WITH TIN-LEAD.
3. CONTACT : PHOSPHOR BRONZE 0.35mm THICKNESS, PLATED WITH HARD GOLD AND TIN-LEAD ON SOLDER TAIL.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

ORDER INFORMATION:

MJK766-Pa881GXtSb-8S-LX

MJK: MODULAR JACK

766: SERIES NO.

Pa: TERMINAL TYPE, PCB TYPE, RIGHT ANGLE

88: NO. OF CONTACT, 8P8C

1: COLOR OF PLASTIC, BLACK

GXxt: CONTACT PLATING

Gft: GOLD FLUSH ON CONTACT, TIN PLATING ON SOLDER TAIL

G15t: 15u" GOLD ON CONTACT, TIN PLATING ON SOLDER TAIL

G30t: 30u" GOLD ON CONTACT, TIN PLATING ON SOLDER TAIL


G50t: 50u" GOLD ON CONTACT, TIN PLATING ON SOLDER TAIL

Sb: SHIELDED WITH PANEL GROUNDING TAB

8: 8 PORTS

S: STACKED

LX: LED OPTIONS

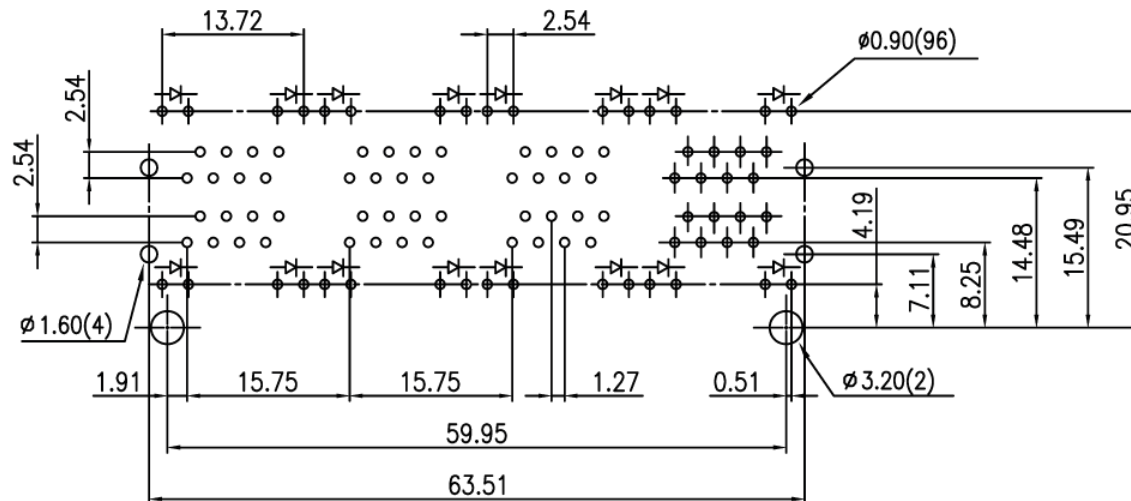

TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.25			SIGNATURES		DATE	MODEL	
			DRAWN	ZOLA	09/APR/03'	TITLE	
SYMBOL △	UNIT mm	SCALE 2/1	CHECKED			MODULAR JACK	
			APPROVALS			NO. MJK766-Pa881G_tSb-8S-L_	
Machrone							

Machrone